




SPECIFICATION

- Valves are manufactured in accordance with DIN 3202 F4, JIS B2002
- End connection: Flanges are according to BS 4504 PN16, JIS 10K
- Operating pressure: 16 bar
- Shell test pressure: Up to 24 bar
- Operating temperature: Max + 130°C
- Working Medium: Water, Oil, Air, Steam
- Top flange dimensions: ISO 5211
- Actuation: Lever operated for DN 25 to DN 150
Gear operated for DN 200 to DN 250
- Optional: Pneumatic or Electric actuated



CAST IRON BALL VALVE

Model: KVS - 303

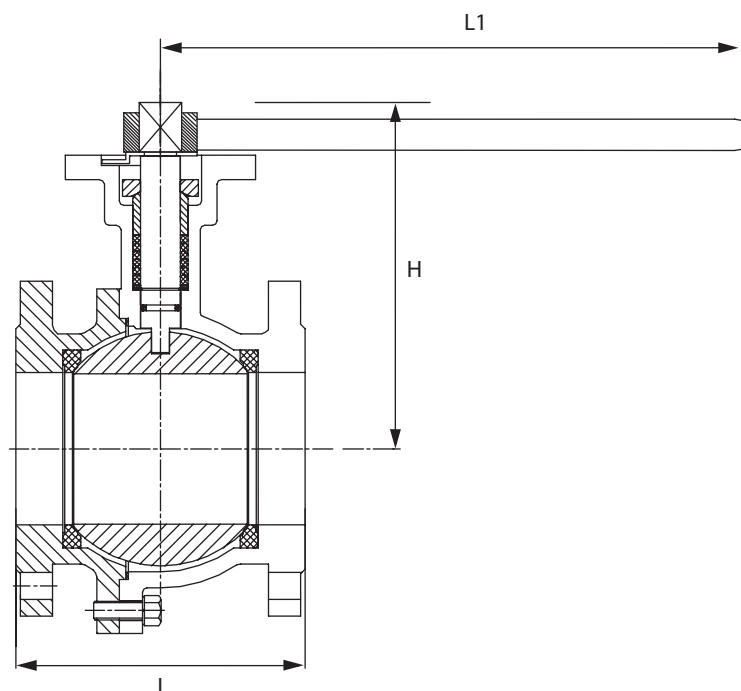

MATERIALS

Description	Material
Body	Cast Iron
Bonnet	Cast Iron
Ball	Stainless Steel
Packing	PTFE
Gasket	PTFE
Lever Handle / Gear Operator	Carbon Steel / Cast Iron

DIMENSIONS (mm)

DN		L	H	L1
inches	MM			
1"	25	125	107	160
1 1/4"	32	130	113	160
1.5"	40	140	130	250
2"	50	150	146	220
2.5"	65	170	176	284
3"	80	180	222	284
4"	100	190	300	500
5"	125	325	325	600
6"	150	350	350	800
8"	200	400	-	1000
10"	250	450	-	-